


Security Wire Mesh Installation

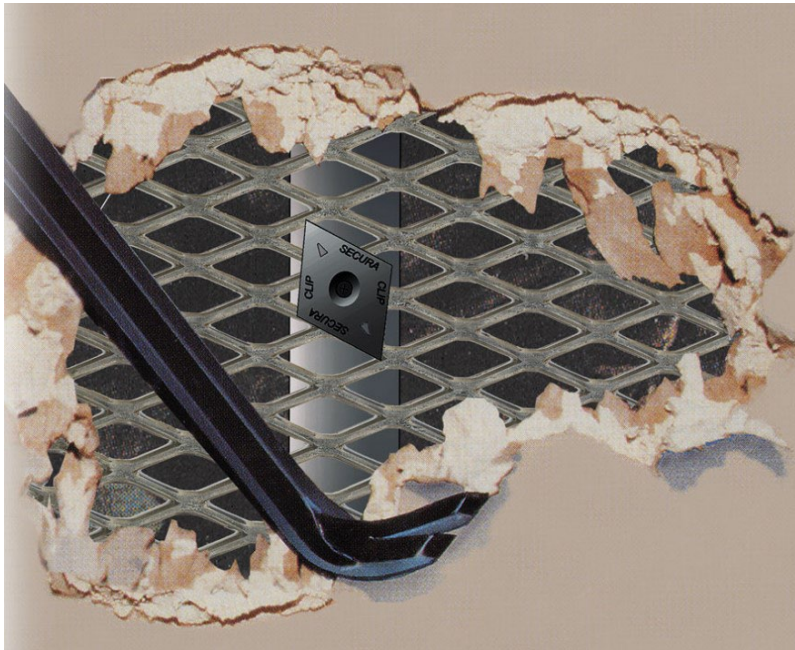

Methods of Cutting:

Security Mesh can be cut with any of the following: hand-held circular with an abrasive or carbide tip blade, heavy-duty nibbler, hand-held grinder with a cutting wheel, or cutting torch.

Methods of attachment:

Steel Framing Applications – Secura Clips are used to fasten Security Mesh to steel framing members using fine thread bugle head self-tapping screws with a #8 shank long enough to penetrate the steel framing member at least 3/8"

Wood Framing Applications – Secura Clips are used to fasten Security mesh to wood framing members using a 1-5/8" fine thread #6 shank drywall screw.

Panel joints should be butted and occur over studs. The overlapping of panels is acceptable